

Together we're helping
build safer, stronger
structures.



Product List

2023 – 2024

Effective November 2023

C-SSTAU23



QuikDrive[®]

Anchors

Fasteners

Connectos



strongtie.com.au

Call **1300 STRONGTIE** (1300 787 664)

Company Information

For more than 60 years, Simpson Strong-Tie has focused on creating structural products that help people build safer and stronger homes and buildings. A leader in structural systems research and technology, Simpson Strong-Tie is one of the largest suppliers of structural building products in the world.

The Simpson Strong-Tie commitment to product development, engineering, testing and training is evident in the consistent quality and delivery of its products and services.

Simpson Strong-Tie Australia product lines include:

- Fastening systems including Quik Drive® auto-feed screw driving systems
- Simpson Strong-Tie® anchors and fasteners for concrete and masonry
- Repair, Protection, and Strengthening systems
- Structural connectors for timber construction

For more information, call **1300 STRONGTIE** or visit our website **strongtie.com.au**

SIMPSON Strong-Tie

Trust Our 60+ Years of Performance

strongtie.com.au

Quik Drive®

Anchors

Fasteners

Deck Drive®

READY SET LOAD

AT-HP

BRANZ Approved

DWP SOFTWOOD Screw
DWR HARDWOOD TO SOFTWOOD Screw
DHS HARDWOOD Screw
BFHSD BI-METAL Screw

C-SSTAL23 © 2023 SIMPSON STRONG-TIE COMPANY INC.

S&P FRP Systems
Structural reinforcement with fibre composites

- S&P C-Laminate
- Pre-stressed S&P C-Laminate
- S&P Sheets

Smart design from product to project

Strong-Rod™ ATS Systems

ER, SECTION B-B
NEAR EDGE ANCHOR BOLT PLAN
NEAR EDGE ANCHOR BOLT ONLY SECTION B-B

Connectors for Timber Construction

Connectors

Tension Ties and Holdowns

Tension Tie

Image	Model No.	Description	Thickness (mm)	Finish	Barcode	Ctn Qty
	DTT1Z	Deck Tension Tie- Base Width 38mm x Height 180mm x Base Depth 37mm	2	ZMAX® Galvanised	707392398592	40
	DTT1Z-KT	Tension Tie Kit Includes: 4 – DTT1Z, 24 – SD #9 x 38mm screws and 4 – SDWH 7 x 200mm screws			707392694137	4
	DTT2Z	Base Width 85mm x Height 175mm x Base Depth 40mm Includes washer and 8 – SDS 6.4 x 38 mm screws			707392528203	20
	HTT4	Base Width 60 mm x Height 315 mm x Base Depth 60 mm	3.1	Z275 Galvanised	707392894605	16
	HTT5	Base Width 62mm x Height 405mm x Base Depth 60 mm			707392617907	10
	HTT22E	Base Width 60mm x Height 558mm x Base Depth 60mm			3523140697987	10
	HDU8-SDS2.5	HDU Heavy Duty Holdown Base Width 75mm x Height 420mm x Base Depth 90mm	3.5	Z275 Galvanised	707392934608	6

Post Bases

Adjustable Post Base

	ABU44Z	Suits 90 mm sq. post	Base 1.6 Strap 2.7	ZMAX®	044315936401	12
	ABU44SS			316L Stainless Steel	707392440901	6
	ABU66Z	Suits 140 mm sq. post	Base 2.7 Strap 3.5	ZMAX®	044315119606	10

Concealed Post Base

	CPT90Z	Suits 90 mm sq. post	Base 2.7 Knife Plate 3.5	ZMAX®	707392420934	10
	CPT90SS		Base 2.7 Knife Plate 3.5	316L Stainless Steel	707392210979	10
	CPT115Z	Suits 115 mm sq. post			707392014376	10
	CPT140Z	Suits 140 mm sq. post	Base 2.7 Knife Plate 3.5	ZMAX®	707392342595	8
	CPT200Z	Suits 190 mm sq. post			707392505327	6


Connectors for Timber Construction

Connectors

Image	Model No.	Description Suitable Timber Range (mm)	Bracket Seat (mm)			Thickness (mm)	Finish	Barcode	Ctn Qty
			H	W	B				


Joist Hangers for Solid Sawn and Glulam Beam

Double Shear Joist Hanger




45 mm (w) Timber									
LUS46/77Z	90 – 130 mm (h)	77	46	45	1.2	ZMAX®	707392503156	50	
LUS46/118Z	120 – 190 mm (h)	118					707392422525	50	
LUS46/166Z	170 – 290 mm (h)	166					707392842149	50	
LUS46/77SS	90 – 130 mm (h)	77					707392422068	25	
LUS46/118SS	120 – 190 mm (h)	118					707392604594	25	
LUS46/166SS	170 – 290 mm (h)	166					707392769026	25	

Face Fix Joist Hanger




45 mm (w) Timber									
SAE200/46/2	90 – 120 mm (h)	77	46	84	2	Z275 Galvanised	3523140470405	50	
SAE250/46/2	115 – 150 mm (h)	102					3523140461700	50	

Heavy Duty Face Fix Joist Hangers



45 mm (w) Timber									
HU140/45	140 – 205 mm (h)	137	46	64	2	Z275 Galvanised	707392017431	25	
HU170/45	170 – 255 mm (h)	170					707392017448	25	
HU240/45	240 – 355 mm (h)	237					707392017455	25	
HU285/45	285 – 420 mm (h)	281					707392017462	25	
63 mm (w) Timber									
HU135/63	135 – 190 mm (h)	133	65	67	2	Z275 Galvanised	707392017479	50	
HU170/63	170 – 250 mm (h)	167					707392017486	25	
HU225/63	240 – 360 mm (h)	225					707392017837	25	
HU275/63	275 – 410 mm (h)	275					707392017493	25	
90 mm (w) Timber									
HU120/90	120 – 180 mm (h)	120	90	67	2	Z275 Galvanised	707392017509	50	
HU155/90	160 – 235 mm (h)	155					707392017516	25	
HU215/90	215 – 315 mm (h)	213					707392017523	25	
HU265/90	265 – 390 mm (h)	263					707392017530	25	
HU305/90	305 – 450 mm (h)	302					707392017844	25	

Heavy Duty Split Face Fixed Joist Hangers



SDE340/30	60 – 120 (w) x 140 – 207 mm (h)	140	30 (each leg)	84	2	Z275 Galvanised	3523140454962	25
SDE380/30	60 – 120 (w) x 160 – 237mm (h)	160					3523140632063	
SDE440/30	60 – 120 (w) x 190 – 282 mm (h)	190					3523140632643	

C-SSTA123 © 2023 SIMPSON STRONG-TIE COMPANY INC.

Connectors for Timber Construction



Connectors

Image	Model No.	Description Suitable Timber Range (mm)	Bracket Seat			Thickness (mm)	Finish	Barcode	Ctn Qty
			H	W	B				
Concealed Connectors for Solid Sawn and Glulam Beam									
	CJT3ZS	CJT Concealed Joist Tie 140 – 185mm (h)				2.7	ZMAX®	707392884538	1
	CJT4ZS	CJT Concealed Joist Tie Min. 235mm (h)	N/A	47	51			707392339458	1
	CJT5ZS	CJT Concealed Joist Tie Min. 286mm (h)						707392443940	1
	CJT6ZS	CJT Concealed Joist Tie Min. 286mm (h)						707392334637	1
Partially Concealed Joist Hangers									
	IUC142/47	45 x 145-240mm	142	47	51	1.2	Z275 Galvanised	5015364578107	30
	IUC192/47	45 x 195-320mm	192					5015364730505	30
Slopeable and Skewable Rafter Hanger									
	LSSR1.81Z	45 (w) x 240 – 360 mm (h)	227	46	—	1.3	ZMAX®	707392003755	25
	LSSR2.1Z	53 (w) x 240 – 360 mm (h)		54		1.3		707392003762	25
	LSSR410Z	90 (w) x 240 – 360 mm (h)		92		1.6		707392003939	25
Variable Pitch Rafter Connectors									
	VPA25	VPA Variable-Pitch Connector 45mm (w)	—	46	51	1.3	Z275 Galvanised	044315699603	25
	RR47	Ridge Rafter 47mm	83	46	33	1.2		5015364337537	75
I-Joist Hole Supports									
	IHS240	I-Joist Hole Support - suit 240mm I Joist				1.5	Pre-galvanised mild steel (Z275)	5015364960506	5
	IHS300	I-Joist HoleSupport - suit 300mm I Joist						5015364492908	5
Multiple Joist Connector									
	MJC	Multiple Joist Connector 133mm x 65mm				1.2	Z275 Galvanised	5015364237509	100
Bracing and Tie Downs									
Framing Angle									
	A35Z	35 x 35 x 115 mm				1.5	ZMAX®	044315393600	100
	A35SS	Bending slot allows field bend for 2 and 3-way ties					316L Stainless Steel	044315178702	25








C-SS12A123 © 2023 SIMPSON STRONG-TIE COMPANY INC.

Connectors for Timber Construction

Connectors

Image	Model No.	Description Suitable Timber Range (mm)	Bracket Seat (mm)			Thickness (mm)	Finish	Barcode	Ctn Qty
			H	W	B				
Hurricane Ties									
	H1.81Z	135 x 135 x 21 mm Suits 45 mm timber					ZMAX®	707392000433	50
	H2.5A					1.3	Z275 Galvanised	707392398806	100
	H2.5AZ	35 x 35 x 150 mm					ZMAX®	707392172109	100
	H2.5ASS						316L Stainless Steel	707392538202	100
	H3Z	40 x 40 x 115mm Carton quantity is equal mix of left and right hand ties. Pricing is per each					Z275 Galvanised	044315079207	100

Connectors for Light Steel Frame

	HTT5	Tension Tie - Base Width 62mm x Height 405mm x Base Depth 60mm (W = 64mm)				3.1		707392617907	10
	DTC	Roof truss clip, 64mm x 48mm x 70mm						044315186004	100
	STC	Roof truss clip, 32mm x 48mm x 70mm						044315810008	200
	S/H2.5	All-purpose hurricane tie 40mm x 40mm x 138mm				1.3	Z275 Galvanised	44315480805	100
	S/H1A	All-purpose hurricane tie (H)112mm x (W)133mm x (D)19mm						707392378808	100
	S/HTC4	Slotted Heavy Truss Clip (H) 89mm x 90mm (W)						707392318309	50
	E5 (E5 /1.5 /11.22 /11)	Reinforced Angle Bracket 65mm x 75mm x 48mm				1.5		3523140201542	200

C-SSTAUL23 © 2023 SIMPSON STRONG-TIE COMPANY, INC.

Connectors for Timber Construction

Connectors




Image	Model No.	Description Suitable Timber Range (mm)	Bracket Seat			Thickness (mm)	Finish	Barcode	Ctn Qty
			H	W	B				

Connectors for High Wind Zones



	 VGT	Variable Pitch Girder Tie Down				4.5	Z275 Galvanised	707392678007	6
	SDS25300-R25	Heavy Duty Connector Screw (6.4mmx76mm)				6.4	Mechanically Galvanised Class 55	707392800606	25
	HTT4	Tension Tie - Base Width 60mm x Height 315mm x Base Depth 50mm, Z275 Galvanised				3.1	Z275 Galvanised	707392894605	16
	HTT5	Tension Tie - Base Width 60mm x Height 405mm x Base Depth 60mm, Z275 Galvanised			62	3.1	Z275 Galvanised	707392617907	10
	 S/HDU9	Light Gauge Steel Holddown				3.5	Z275 Galvanised	707392950806	6
	DTT2Z	Tension Tie w/screws - 85 x 175 x 40mm, Includes washer and 8 – SDS 6.4 x 38mm screws, ZMAX®				2	ZMAX® Galvanised	707392528203	20
	AE116	Angle 90X48X3,0X116 3X				3	Z275 Galvanised,	'5701953351168	50
	 AE76	Angle 90X48X3,0X76 4X				3	Z275 Galvanised	'5701953351168	100
	 SDWF2720-TUW	20 Inch (508mm) Floor- Floor take up screw kit (kit contains 25 x SDWF Screws, 25 TUW's, 100 SD#9 connector screws)				6.85	Fastener - E-coat® I TUW - Z275G I SD#9 - MG Class 55	'707392885405	25

Outdoor Structures

Staircase Angle



	TA9Z-R	Staircase Angle 40 x 40 x 210 mm				2.7	ZMAX®	707392459750	20
	 LSCZ	Light Stair Stringer Connector, ZMAX®				1.3	ZMAX®	707392273103	25

Timber Fence Post Mender


	FPBM44E		Repair or reinforcement of rotted or damaged 90 mm timber fence posts			2.7	Black Powder Coating	707392248705	6
	FPBM75E		Repair or reinforcement of rotted or damaged 75 mm timber fence posts					707392016618	6

Connectors for Timber Construction


Connectors

Image	Model No.	Description Suitable Timber Range (mm)	Bracket Seat (mm)			Thickness (mm)	Finish	Barcode	Ctn Qty
			H	W	B				
	 FPBS44	E-Z Spike™ E-Z Post Base Spike				2.7	Black Powder Coating	707392885702	4

Fixes and Miscellaneous


Tie Plate									
	TP15	45 x 125 mm – 13 holes				1	Z275 Galvanised	044315831003	150


Outdoor Accents®




Post Base									
	APVB90	Suits 90 x 90 mm timber				Base 1.6 Strap 2.7	ZMAX® with Black Powder Coating	707392009143	8

Deck Joist Tie									
	APVDJT45	Suits 45 mm wide joists				2.7	ZMAX® with Black Powder Coating	707392009160	12

Strap Ties									
	APVL90	L-Strap Tie — Suits min. 90 mm timber				2.7	ZMAX® with Black Powder Coating	707392009122	8
	APVT90	T-Strap Tie — Suits min. 90 mm timber						707392009139	8
	APVST90300	Flat-Strap Tie — Suits min. 90 mm timber						707392009177	8

Concealed Hangers									
	APLH45140	Suits 45 mm (w) x 140 – 210 mm (h)				2	ZMAX® with Black Powder Coating	707392009184	24
	APLH45240	Suits 45 mm (w) x 210 – 330 mm (h)						707392009191	12

Face Fix Hangers									
	SAE200/46/2PB	Suits 45 mm (w) x 90 – 120 mm (h)				2	ZMAX® with Black Powder Coating	3523140001821	8
	SAE250/46/2PB	Suits 45 mm (w) x 115 – 150 mm (h)						3523140001838	12

Angles									
	APVA50	Light Angle - Suits min. 45mm Timber				2		707392009105	45
	APVA90	Heavy Angle - Suits min. 90mm Timber				2.7	ZMAX® with Black Powder Coating	707392009115	12
	APVKB45-4	Knee Brace — suits 90mm, 45 degree				2.7		707392017615	12

Decorative Plate									
	APVDW56-M	Decorative Plate (Fastener is SDWS90DBB-R50 or SDWS140DBB-R50, inserted through an STN22M-R8 washer.)				2.7	ZMAX® with Black Powder Coating	707392009153	24

C-SSTAUL23 © 2023 SIMPSON STRONG-TIE COMPANY INC.

Connectors for Timber Construction


Image	Model No.	Description	Box Qty	Thickness (mm)	Finish	Barcode	Ctn Qty
SDWS Structural Timber Screw							
	SDWS90DBB-R50	90 mm Ribbed large washer head, Patented SawTooth™ point, T-40 6-lobe drive	50	5.6mm shank	Double-Barrier Coating	707392009214	6
	SDWS140DBB-R50	140 mm				707392009221	6
Connector Screw							
	SD38DBBR50	10g x 38 mm Connector Screw, ¼" Hex head, Patented serrated threads, Sharp point	50	4mm shank	Double-Barrier Coating	707392009245	5
Hex-Head Washer							
	STN22M-R8	Hex-Head Washer	8	38mm diameter	Quik Guard® Black with Black Powder Coating	707392009238	10
Gable Plates							
	APVGP1212-4	Suits 90mm Wide Timber, 45° pitch gable		2mm	ZMAX® Galvanised with Black Powder Coating	707392014676	2
	APVGP1212	Suits 140mm Face, Ideal for 45°pitch gable		2mm		707392008187	2
Decorative Bottle Opener							
	APBO-KT	Decorative Bottle Opener. Includes fasteners - Mission Collection®			Backplate and catch cup — texturized composite plastic; Bottle opener — metal	707392015758	4
Engineered Wood (CLT and Glulam) Timber Connectors							
Tension Ties							
	HTT5	Base Width 60mm x Height 405mm x Base Depth 60mm, W=62mm		3.1	Z275 Galvanised	707392617907	10
	HTT22E	Base Width 60mm x Height 558mm x Base Depth 60mm, W=64mm				3523140697987	10
Angle Bracket							
	ABR9020	Width 65 mm x Flange (a) 88mm x Flange (b) 88mm		2.0		5701953354305	50
	ABR105	Width 90mm x Flange (a) 105mm x Flange (b) 105mm		2.5		5701953351052	50
	AE116	Flange (a) Depth 90mm x Flange(b) Depth 48mm x Width 116mm		3.0	Z275 Galvanised	5701953351168	50
	ABR255	Flange(a) Depth 120mm x Flange(b) 100mm x Width 255mm		3.0		3523140899954	10
Concealed Beam Hanger							
	CBH2.37X5.5B-KT	60.2mm wide x 139.7mm High. Includes Fasteners		6	Z275 Galvanised	707392010746	1
	CBH2.37X7.63B-KT	60.2mm wide x 193.8mm High. Includes Fasteners		6		707392010753	1

Connectors for Timber Construction

Connectors


Image	Model No.	Description Suitable Timber Range (mm)	Bracket Seat (mm)			Thickness (mm)	Finish	Barcode	Ctn Qty	Price/ea
			H	W	B					

Nail Plate



NPB255	Height 214mm x Width 255mm	3.0	Z275 Galvanised	3523140456393	10
--------	----------------------------	-----	-----------------	---------------	----

Diaphragm Straps for Engineered Wood



MSTC78	Width 76mm x Length 1975mm	2		044315370908	5
MDCST48	Width 146mm x Length 1207mm	2	Z275 Galvanized	707392001829	1
LDSS48	Light Diaphragm Spline Strap 95 x 1207 x 1.5mm (Fasteners WSV75SA 10 x 75mm Quik Drive)	2		707392020523	10

Strong-Wall® Site-Built Portal Frame System



PFS-HKSAU	Single-Wall Portal Frame Kit Includes: (2) Holddown assemblies, (2) Composite standoff bases, (5) Moment connection straps, (1) Adjustable post base (ABW44Z), (33) SDW22300 truss-ply screws, (8) SD9112 Connector screws, (1) 6-lobe T40 driver bit, (1) Installation instructions.	707392009252	1
-----------	---	--------------	---









PFS-HKDAU	Double-Wall Portal Frame Kit Includes: (4) Holddown assemblies, (4) Composite standoff bases, (8) Moment connection straps, (66) SDW22300 truss-ply screws, (1) 6-lobe T40 driver bit, (1) Installation instructions.	707392009269	1
-----------	--	--------------	---



The quality and variety of our CLT product lines gives engineers and builders more freedom to design flexibly, while offering reliable and proven performance.

KlevaKlip

















Image	Model No.	Description	Thickness (mm)	Finish	Barcode	Ctn Qty
Deck Structure Building Products						
	NEW PDKIT	Patio Deck KIT 9 x 1m Long Aluminium Joists +36 Base Clips Covers Approx 3.6sq metres	2	Aluminium	707392025252	9
	NEW PKADJ	Patio Deck KIT Height Adjuster 36 x Height Adjusters for Patio Deck Kit Allows aluminium joist adjustment in small increments to maximum top of joist height of 65mm	-	Engineered Nylon	707392025276	36
	NEW MT90G	90mm Merbau Galvanised Clip Top Fix - Suits 90mm Klin Dried Merbau/Kwila	1.2	Galvanised	707392025238	40
	NEW MT90S	90mm Merbau Steel Clip 304 Stainless Steel Top Fix - Suits 90mm Klin Dried Merbau/Kwila	1.2	304 Stainless Steel	707392025245	40
Deck Structure Building Products						
	NEW AJH38G-R24	Adjustable Joist Support 38mm width Joists (No Bolts, Nuts, Washers or Concrete Fixings)			707392025290	24
	NEW AJH45G-R24	Adjustable Joist Support 45mm width Joists (No Bolts, Nuts, Washers or Dynabolts)	2.5		707392025337	24
	NEW AJ45KIT	Adjustable Joist Support KIT 45mm width Joists (Includes Bolts, Nuts, Washers+ Dynabolts)			707392025405	16
	NEW AJH50G-R24	Adjustable Joist Support 50mm width Hardwood & Steel Joists (No Bolts, Nuts, Washers or Dynabolts)		Hot Dipped Galvanisation	707392025375	24
	NEW MPSKIT-R8	Multi-Purpose Support KIT For use with Bearer/Joist combination or larger Joists Minimum height - 90mm Maximum height - 150mm	3		707392025412	8
	NEW ABS70G-R8	Adjustable Bearer Support 70mm & 90mm width Bearers	4.5		707392025436	8

C-SSTAU23 © 2023 SIMPSON STRONG-TIE COMPANY INC.

Connectors

KlevaKlip

Connectors

Image	Model No.	Description	Thickness	Finish	Barcode	Ctn Qty
Fibre Reinforced Engineered Polymer						
	 DTC45	Double Triple Connector Most size Bearers to 45mm width Joist			'707392025467	40
	 DTC45-R10	Double Triple Connector Most size Bearers to 45mm width Joist			'707392025450	10
	 JC9045	Joist Connector ⁹⁰ / ₄₅ 90mm width Bearer to 45mm width Joist			'707392025504	48
	 JC9045-R24	Joist Connector ⁹⁰ / ₄₅ 90mm width Bearer to 45mm width Joist			'707392025498	24
	 FREP JH9045	FREP Joist Hanger 90mm X 45mm Joist	2	Fibre Reinforced Engineered Polymer	'707392025528	40
	 FREPNJ9045-R24	FREP Joist Hanger 90mm X 45mm Joist			'707392025511	24
	 FPEPJH14045	FREP Joist Hanger 140mm x 45mm Joist			'707392026099	42
	 FREPJH 14045-R20	FREP Joist Hanger 140mm x 45mm Joist			'707392026082	20



C-SSTA123 © 2023 SIMPSON STRONG-TIE COMPANY, INC.

Screws and Nails

Image	Model No.	Description	Finish	Barcode	Box Qty	Ctn Qty
-------	-----------	-------------	--------	---------	---------	---------

Collated Connector Nails

Pneumatic Collated Connector Nailer



CCN64

Accepts 38 mm and 64 mm length,
3.3 mm or 3.8 mm shank,
Full round head, 33° paper collated nails

707392710929

1

2

Strong-Drive® SCN Smooth-Shank Collated Connector Nail



N8HDGPT500

8

38 mm x 3.32 mm

33° Collation,
22 nails per strip,
Full round-smooth head,
Smooth Shank,
Diamond point

Hot-Dip Galvanised

707392215301

500

4

N8HDGPT4000

707392650317

4000

—

N10HDGPT500

38 mm x 3.75 mm

707392703808

500

4

N10HDGPT3000

10

707392457282

3000

—

N10DHDGPT500

64 mm x 3.75 mm

707392443100

500

4

N10DHDGPT2500

707392784869

2500

—

Strong-Drive® SCNR Ring-Shank Collated Connector Nail



T10A150MCN

All Sizes

38 mm x 3.32 mm

33° Collation,
22 nails per strip,
Full round-smooth head,
Annular-Ring Shank,
Diamond point

316 Stainless Steel

707392647232

1500

4

T9A150MCN

38 mm x 3.75 mm

744039022335

1500

4

T9A250MCN

64 mm x 3.75 mm

744039600823

1000

4

Loose Connector Nails

Strong-Drive® SCN Smooth-Shank Connector Nail



N8DHDG-R

8

38 mm x 3.32 mm

Full round-smooth head,
Smooth Shank,
Diamond point

Hot-Dip Galvanised

707392190677

150

12

N8D5HDG-R

38 mm x 3.75 mm

707392637226

750

4

N10DHDG-R

38 mm x 3.75 mm

707392841630

120

12

N10D5HDG-R

10

707392710257

600

4

10D5HDG-R

75 mm x 3.75 mm

707392478737

250

4

Strong-Drive® SCNR Ring-Shank Connector Nail



SSNA8D

All Sizes

38 mm x 3.32 mm

Full round-smooth head,
Annular-Ring Shank,
Diamond point

316 Stainless Steel

707392915607

150

10

SSNA8D5

38 mm x 3.75 mm

707392110200

750

6

SSNA10D

38 mm x 3.75 mm

707392353003

120

10

SSNA10D5

75 mm x 3.75 mm

707392499404

600

6

SSA10DD

707392400004

50

10

SSA10D5

707392819509


250

6

Connector Screws

Strong-Drive® SD Connector Screw

Supplied with driver bit



SD9112R100

315

#9 x 38 mm

1/4" Hex head
Patented serrated threads,
Sharp point

Mechanically Galvanised

707392977001

100

10

SD9212R100-R

325

#9 x 64 mm

316 Stainless Steel

707392884446

100

4

SD9112SS-R100

315

#9 x 38 mm

707392015239

100

10

SD9212SS-R100

325

#9 x 64 mm

707392015208

100

6

SD10112R100

1015

#10 x 38 mm

Mechanically Galvanised

707392461203

100

10

SD10212R100-R

1025

#10 x 64 mm

707392450290

100

4

Strong-Drive® SDS Heavy-Duty Connector Screw

Driver bit NOT included



SDS25112-R25

12.5

6.4 mm x 38 mm

3/8" Hex Head
Serrated threads Type 17

Double-Barrier Coating

707392962502

25

SDS25212-R25

12.5

6.4 mm x 64 mm

707392325703

25

12

SDS25300-R25

13

6.4 mm x 76 mm

707392800606

25

SDS25112SS-R25

12.5

6.4 mm x 38 mm

316 Stainless Steel

707392322405

25

10

SDS25212SS-R25

12.5

6.4 mm x 64 mm

707392624103

25

10

SDS25300SS-R25















13

6.4 mm x 76 mm

707392459408










25

Screws and Nails

Image	Model No.	Diameter	Length	Description	Barcode	Box Qty	Ctn Qty
Structural Screws							
Strong-Drive® SDWS TIMBER Screw		Suitable for Treated Timber			Supplied with driver bit		
	50 Pack						
	SDWS22300DB-R50		76 mm		746056005186	50	
	SDWS22400DB-R50		102 mm		746056005216	50	
	SDWS22500DB-R50	7.7mm	127 mm	Ribbed large washer head Patented SawTooth™ point Double-Barrier Coating. T-40 6-lobe drive	746056005247	50	6
	SDWS22600DB-R50	Major/5.6 mm Shank	152 mm		746056005278	50	
	SDWS22800DB-R50		203 mm		746056005308	50	
	SDWS221000DB-R50		254 mm		746056005339	50	
	Bulk Pack						
	SDWS22300DB		76 mm		746056005193	950	
	SDWS22400DB		102 mm		746056005223	600	
	SDWS22500DB	7.7mm	127 mm	Ribbed large washer head Patented SawTooth™ point Double-Barrier Coating. T-40 6-lobe drive	746056005254	600	
	SDWS22600DB	Major/5.6 mm Shank	152 mm		746056005285	500	
	SDWS22800DB		203 mm		746056005322	400	
	SDWS221000DB		254 mm		746056005346	250	
Strong-Drive® General Purpose Framing Screws – Bit Included (suitable for treated timber)							
	 SDWS16212QR50		64 mm		707392010357	50	10
	 SDWS16212QR150		64 mm		707392010364	150	3
	 SDWS16212Q		64 mm		707392322153	1000	-
	SDWS16300QR50		76 mm		707392010371	50	10
	 SDWS16300QR150		76 mm		707392010388	150	3
	 SDWS16300Q	(12g) 5.5mm	76 mm	Double-Barrier Coating (Equivalent to CL3). T-25 6-lobe drive	707392581345	1000	-
	SDWS16312QR50		89 mm		707392010395	50	10
	 SDWS16312QR150		89 mm		707392015260	150	3
	 SDWS16312Q		89 mm		707392015284	750	-
	 SDWS16400QR50		102 mm		707392010401	50	6
	 SDWS16400QR150		102 mm		707392015277	150	3
	 SDWS16400Q		102 mm		707392015291	750	-
Strong-Drive® General Purpose Hex Head Landscaping Screws – Bit Included (suitable for treated timber)							
	SDWH19400DB-R50	7.0mm Major /	101 mm	Double-Barrier Coating. ⅜" Hex	746056004608	50	6
	SDWH19600DB-R50	5.0 mm Shank	152 mm		746056007708	50	6
	SDWH27400GR30	10.0mm Major /	101 mm	CL4 Hot Dip Galvanised. ⅜" Hex drive	707392993919	30	6
	SDWH27600GR30	5.0 mm Shank	152 mm		707392807964	30	6


C-SSTAL23 © 2023 SIMPSON STRONG-TIE COMPANY INC.

Screws and Nails

Image	Model No.	Description	Barcode	Box Qty	Ctn Qty
Strong-Drive® SDWC TRUSS Screw		Supplied with installation guide and driver bit			
	SDWC15450-KT	3.9 x 114 mm E-Coat®	746056235507	50	6
	SDWC15600-KT	3.9 x 152 mm Cap-style head, Type 17, T30 6-lobe drive	746056548027		
	SDWC15600B-KT	Clear Zinc with Orange Topcoat	707392888307	500	—
Installation Tool for Strong-Drive® SDWC TRUSS Screw					
	QUIKSTIK	Rafter and Truss Fastening System (for use with the Strong-Drive® SDWC TRUSS Screw) Includes sturdy carry case	707392001256	1	—
Strong-Drive® SDPW Deflector Screw		Supplied with offset driver bit and 3/8" predrill bit			
	SDPW14312-R50	Blue 3.5 x 89mm Strong-Drive® SDPW Deflector Screw	707392014447	50	6
	SDPW14312MB		707392014478	500	—
	SDPW14500-R50	Orange 3.5 x 127mm Strong-Drive® SDPW Deflector Screw	707392014454	50	6
	SDPW14500MB		707392014485	500	—
	SDPW19600-R50	Grey 5.0 x 152mm Strong-Drive® SDPW Deflector Screw	707392014461	50	6
	SDPW19600MB		707392014492	400	—
Strong-Drive® SDPW Accessories					
	PWKIT25T	T25 Bit Kit: 1 x Quick Release Predrill Bit (3/8" (9.5 mm) x 5" (127 mm)), 2 x T25 Offset Driver Bits	707392014508	1	12
	PWKIT40T	T40 Bit Kit: 1 x Quick Release Predrill Bit (3/8" (9.5 mm) x 5" (127 mm)), 2 x T40 Offset Driver Bits	707392014515	1	12
	PW18EXT	1 x Extension 450 mm	707392014522	1	15

C-SSTAUL23 © 2023 SIMPSON STRONG-TIE COMPANY INC.

Screws and Nails

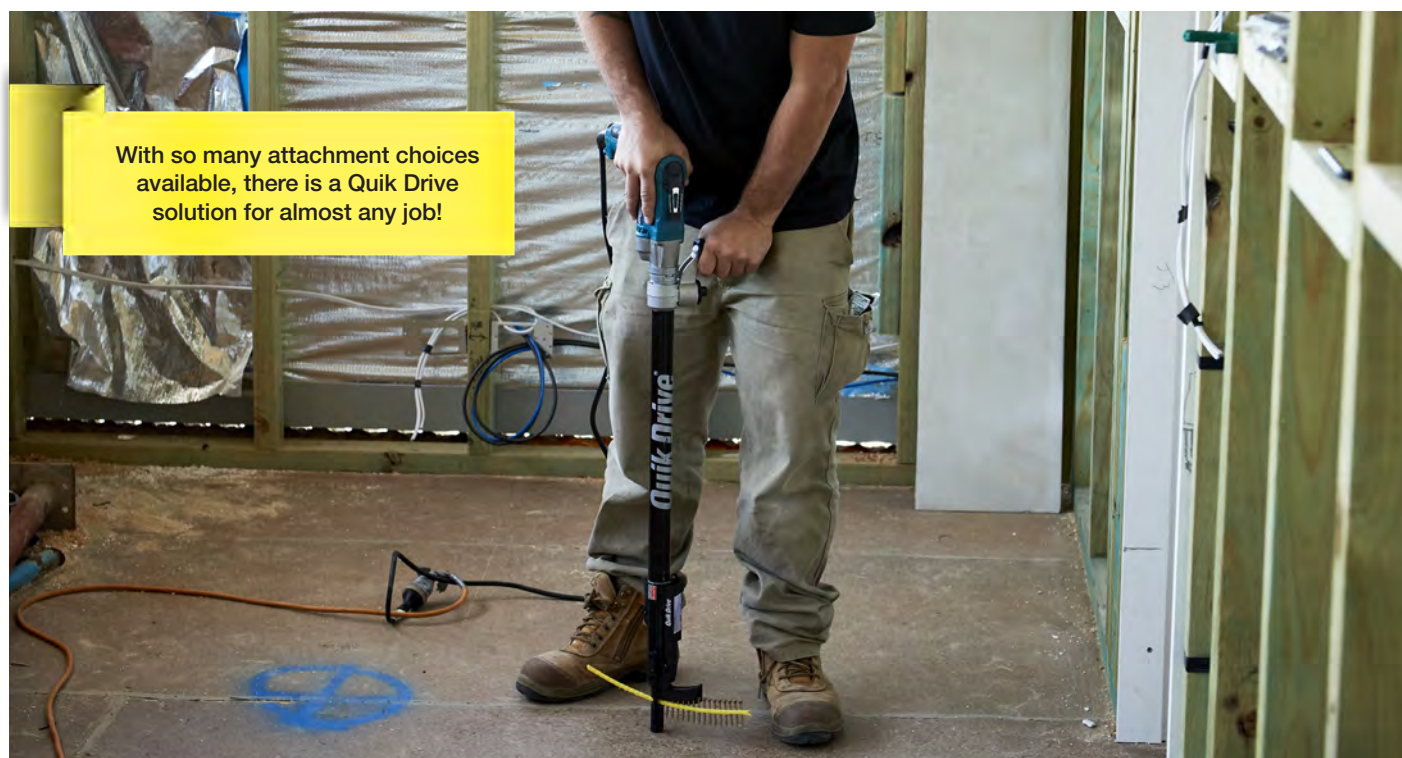



Mass Timber Fasteners


Mass Timber Fasteners

Image	Model No.	Description	Barcode	Box Qty
-------	-----------	-------------	---------	---------

Structural Screws for Mass Timber (CLT and Glulam)

ESCR Partially Threaded Washer Head Structural Timber Screw				Supplied with driver bit	
	ESCR8.0X80	80mm		5015364539801	
	ESCR8.0X100	100mm		5015364710309	
	ESCR8.0X120	120mm		5015364239008	
	ESCR8.0X140	140mm		5015364429300	
	ESCR8.0X160	160mm		5015364846909	
	ESCR8.0X180	180mm	Washer head	5015364697006	
	ESCR8.0X200	8mm 200mm	Milling thread, Sharp point	5015364291501	50
	ESCR8.0X220	220mm	T-40 6-lobe drive	5015364350901	
	ESCR8.0X240	240mm		5015364847005	
	ESCR8.0X260	260mm		5015364313401	
	ESCR8.0X280	280mm		5015364423902	
	ESCR8.0X300	300mm		5015364017705	
	ESCR8.0X320	320mm		5015364653002	

ESCRC Partially Threaded Countersunk Structural Timber Screw				Supplied with driver bit	
	ESCRC8.0X80	80mm		5015364921408	
	ESCRC8.0X100	100mm		5015364679200	
	ESCRC8.0X120	120mm		5015364620806	
	ESCRC8.0X140	140mm		5015364975401	
	ESCRC8.0X160	160mm		5015364361600	
	ESCRC8.0X180	180mm	Countersunk head,	5015364723507	
	ESCRC8.0X200	8mm 200mm	Milling thread, Sharp point,	5015364481100	50
	ESCRC8.0X220	220mm	T-40 6-lobe drive	5015364852306	
	ESCRC8.0X240	240mm		5015364380700	
	ESCRC8.0X260	260mm		5015364612900	
	ESCRC8.0X280	280mm		5015364660307	
	ESCRC8.0X300	300mm		5015364379186	
	ESCRC8.0X320	320mm		5015364101107	

ESCRFTC Fully Threaded Countersunk Structural Timber Screw				Supplied with driver bit	
	ESCRFTC8.0X180	180mm		5015364030735	
	ESCRFTC8.0X200	200mm	Countersunk head,	5015364266363	
	ESCRFTC8.0X240	8mm 240mm	Fully threaded, Split point,	5015364090029	
	ESCRFTC8.0X300	300mm	T-40 6-lobe drive	5015364086794	
	ESCRFTC8.0X400	400mm		5015364097264	
	ESCRFTC10.0X180	180mm		5701953219055	50
	ESCRFTC10.0X220	220mm	Countersunk head,	5015364079253	
	ESCRFTC10.0X240	10mm 240mm	Fully threaded, Split point,	5015364252410	
	ESCRFTC10.0X300	300mm	T-50 6-lobe drive	5015364174590	
	ESCRFTC10.0X350	350mm		5015364181987	

C-SSTA123 © 2023 SIMPSON STRONG-TIE COMPANY, INC.


Mass Timber Fasteners

Image	Model No.	Description	Finish	Barcode	Box Qty
-------	-----------	-------------	--------	---------	---------

Structural Screws for Engineered Timber (CLT and Glulam)

ESCRFTZ Fully Threaded Cylinder Head Structural Timber Screw

Supplied with driver bit



ESCRFTZ8.0X120		120mm		5701953153939	
ESCRFTZ8.0X140		140mm		5015364992149	
ESCRFTZ8.0X160		160mm		5015364980887	
ESCRFTZ8.0X180		180mm		5701953230715	
ESCRFTZ8.0X200		200mm		5015364371654	
ESCRFTZ8.0X220	8 mm	220mm	Cylinder Head Full Thread, Sharp point T-40 6-lobe drive	5015364777395	50
ESCRFTZ8.0X240		240mm		5015364534066	
ESCRFTZ8.0X260		260mm		5701953427252	
ESCRFTZ8.0X280		280mm		5701953002510	
ESCRFTZ8.0X300		300mm		5015364212162	
ESCRFTZ8.0X350		350mm		5701953002527	
ESCRFTZ8.0X400		400mm		5015364413972	

ESCRFT Fully Threaded Cylinder Head Structural Timber Screw

Supplied with driver bit



ESCRFT10.0X450		450mm		5015364583118	
	10mm		Countersunk head, Milling thread, Split point, T-50 6-lobe drive		25
ESCRFT10.0X500		500mm		3523140784984	

CNA Connector Nail



CNA4.0X50		50mm x 4.0mm	Full round-smooth head, Annular-ring shank, Diamond point	Carbon Steel	5701953212209	250
CNA4.0X60		60mm x 4.0mm			5701953504304	250

CSA Connector Screw



CSA5.0X40		5mm x 40mm	Type 17, T-20 6-lobe drive	Electro Galvanised	5701953444105	250
CSA5.0X50		5mm x 50mm			5701953822804	250

CSA Collated Connector Screw














CSA5.0X40T		5mm x 40mm	Type 17, Carbon Steel, T-20 6 lobe drive	Electro Galvanised	3523140828404	1500
CSA5.0x50T		5mm x 50mm			3523140543000	1000

Decking Screws and Driver Bits

Image	Model No.	Description	Barcode	Box Qty	Ctn Qty		
Deck-Drive™ Premium Fasteners							
Supplied with driver bit							
Hardwood							
DSD HARDWOOD Screw							
	DSDG50R250	(12g) 5.5 x 50 mm	Flat countersinking head, Hardwood Drill point, Quikguard® Grey. T-25 6-lobe drive	707392007715	250	6	
	DSDG50R1100			707392007722	1100	1	
	SSDSD50R250	(12g) 5.5 x 50 mm	Flat countersinking head, Hardwood Drill point,	707392007685	250	6	
	SSDSD50R1100			707392007692	1100	1	
	SSDSD65R250	(12g) 5.5 x 65 mm	Flat countersinking head, Hardwood Drill point, 316 Stainless Steel , T-25 6-lobe drive	707392007654	250	6	
	SSDSD65R1100			707392007661	1100	1	
	SSDSD1475R150	(14g) 6.5 x 75 mm	Flat countersinking head, Hardwood Drill point,	707392010111	150	3	
	SSDSD1475R400			707392010128	400	1	
	SSDSD14100R150	(14g) 6.5 x 100 mm	Flat countersinking head, Hardwood Drill point, 316 Stainless Steel , T-30 6-lobe drive	707392010135	150	3	
	SSDSD14100R400			707392010142	400	1	
DHSD HARDWOOD Screw							
	 SSDHSD50TR50	(12g) 5.5 x 50 mm	Raised countersinking head, Hardwood Drill point, 316 Stainless Steel , T-20 6-lobe drive	707392020387	50	4	
	SSDHSD50TR250			707392007739	250	6	
	SSDHSD50TR1100	(12g) 5.5 x 65 mm	Raised countersinking head, Hardwood Drill point, 316 Stainless Steel , T-20 6-lobe drive	707392010197	1100	1	
	SSDHSD65TR50			707392020394	50	4	
	 SSDHSD65TR250	(12g) 5.5 x 65 mm	Raised countersinking head, Hardwood Drill point, 316 Stainless Steel , T-20 6-lobe drive	707392007753	250	6	
	SSDHSD65TR1100			707392007760	1100	1	
DHW HARDWOOD Screw							
	SSDHW60R250	(10g) 4.8 x 60mm	Compact head, Winged, Hardwood drill point, 305 Stainless Steel , #2 Sq. drive	707392441267	250	6	
Softwood							
DWP Softwood & Hardwood Screw							
	T08125WPR500	(8g) 4.2 x 32 mm	Flat head w/ nibs, Box threads, Sharp point, 316 Stainless Steel	T-20 6-lobe drive	707392001409	500	6
	T08162WPR250	(8g) 4.2 x 42 mm			707392001416	250	6
	T10200WPR250	(10g) 4.8 x 50 mm			707392001423	250	6
	T10200WPR1100		707392001485	1100	1		
	T10250WPR250	(10g) 4.8 x 65 mm	Flat head w/ nibs, Box threads, Sharp point, 316 Stainless Steel	T-25 6-lobe drive	707392001430	250	6
	T10250WPR1100				707392001492	1100	1
	T10300WPR250	(10g) 4.8 x 75 mm	Flat head w/ nibs, Box threads, Sharp point, 316 Stainless Steel	T-25 6-lobe drive	707392001447	250	6
	T14300WPR150	(14g) 6.5 x 75 mm			707392010159	150	3
	T14300WPR400				707392010166	400	1
	T14400WPR150	(14g) 6.5 x 100 mm	Flat head w/ nibs, Box threads, Sharp point, 316 Stainless Steel	T-27 6-lobe drive	707392010173	150	3
	T14400WPR400				707392010180	400	1
	T14600WPR100	(14g) 6.5 x 150 mm	707392001478	100	3		


C-SSTAL23 © 2023 SIMPSON STRONG-TIE COMPANY, INC.

Decking Screws and Driver Bits

Image	Model No.		Description	Barcode	Box Qty	Ctn Qty
Deck-Drive™ Premium Fasteners (continued)						
Softwood (continued)						
DSV SOFTWOOD Screw						
	DSVT2R250	(10g) 4.8 x 50 mm	Rimmed flat head with nibs,	707392433088	250	6
	DSVT212R250	(10g) 4.8 x 65 mm	Variable thread design, High-low tip, Quikguard® Tan. T-25 6-lobe drive	707392786337	250	
Composite to Timber						
DCU COMPOSITE Screw						
	DCU234BRR250	(10g) 4.8 x 70 mm	Brown	Cap head,	707392348542	250
	DCU234GRR250		Grey	Tri-lobe threads,	707392104254	250
	DCU234RDR250		Red	Double-cut point,	707392276159	250
	DCU234TNR250		Tan	Quikguard® Colour Finish, T-20 6-lobe drive	707392383529	250
	DCU234SS316R250		—	316 Stainless Steel	707392117551	250
Composite to Steel						
DCSD COMPOSITE Screw						
	DCSD238BRR250	(10g) 4.8 x 60 mm	Brown	Cap head	707392801863	250
	DCSD238GRR250		Grey	#2 Drill point,	707392951742	250
	DCSD238RDR250		Red	Quikguard® Colour Finish,	707392504986	250
	DCSD238TNR250		Tan	#2 Undersize sq. drive	707392746041	250
305 Stainless Steel Trim Head Type 17 Screws						
 <i>(Black painted head)</i>	S07225FTBBK	7g x 55 mm	Trim Head, Type 17, 305 Stainless Steel, T-15 6-lobe drive	707392358749	1750	—
BFHSD BI-METAL Screw						
	SSBFHSD2R40	(10g) 4.8 (16 TPI) x 50 mm	Ribbed flat head,	707392010227	40	4
	SSBFHSD2R250		316 Stainless Steel Bi-Metal, #2 Sq. Drive	707392426738	250	6
410 Stainless Steel Trim Head Self Drilling Screws Driver bit NOT included						
 <i>(Black painted head)</i>	F07T162TDBBK	7g x 42 mm	Trim Head, 19 TPI, #3 Drill Point, 410 Stainless Steel, #1 Sq. Drive	707392534778	5000	—

C-SSTA123 © 2023 SIMPSON STRONG-TIE COMPANY INC.



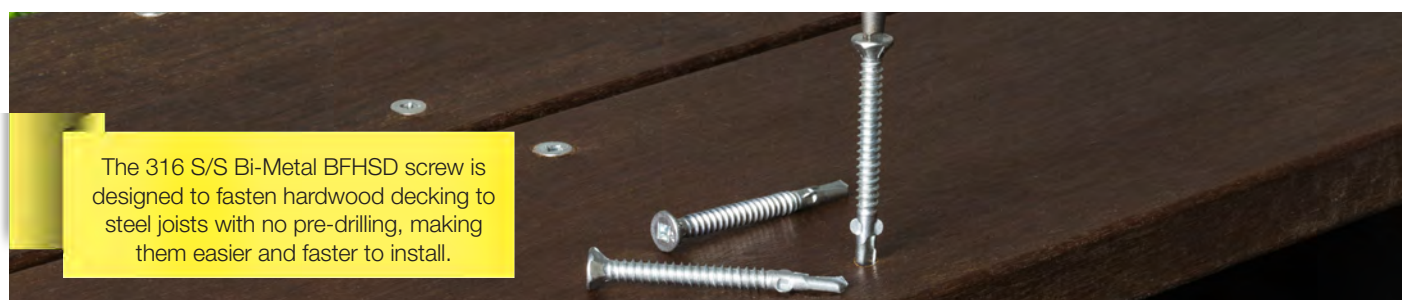












Decking Screws and Driver Bits




The 316 S/S Bi-Metal BFHSD screw is designed to fasten hardwood decking to steel joists with no pre-drilling, making them easier and faster to install.

Decking Screws and Driver Bits

Decking Screws and Driver Bits

Image	Model No.	Description	Barcode	Box Qty	Ctn Qty
Industrial Grade Driver Bits – Carded and Colour-Coded					
	BIT10T-2-R2	T-10 6 Lobe. Red Ring	707392017363		
	BIT15T-2-R2	T-15 6 Lobe. Red Ring	707392010586		
	BIT20T-2-R2	T-20 6 Lobe. Violet Ring	707392010579		
	BIT25T-2-R2	T-25 6 Lobe. Green Ring	707392010562	2	
	BIT27T-2-R2	T-27 6 Lobe. Brown Ring	707392010593		10
	BIT30T-2-R2	T-30 6 Lobe. Black Ring	707392010524		
	BIT40T-134-R2	T-40 6 Lobe. Blue Ring	707392010531		
	BIT50T-2-R1	T-50 6 Lobe. White Ring	707392014416	1	
	BIT1S-2-R2	#1 Square. Green Double Ring	707392010616	2	
	BIT2S-2-R2	#2 Square. Red Double Ring	707392010623		
	BIT3S-2-R2	#3 Square. Black Double Ring	707392010630	2	10
	BITHEXR14-R1	¼" Hex Socket Bit Black Ring	707392017370		
	BITHEXR516-R1	⅝" Hex Socket. Yellow Ring	707392010548		
	BITHEXR38-R1	⅜" Hex Socket. Blue Ring	707392010555	1	5
	BITHEXR12-R1	½" Hex Socket. Red Ring	707392010609		

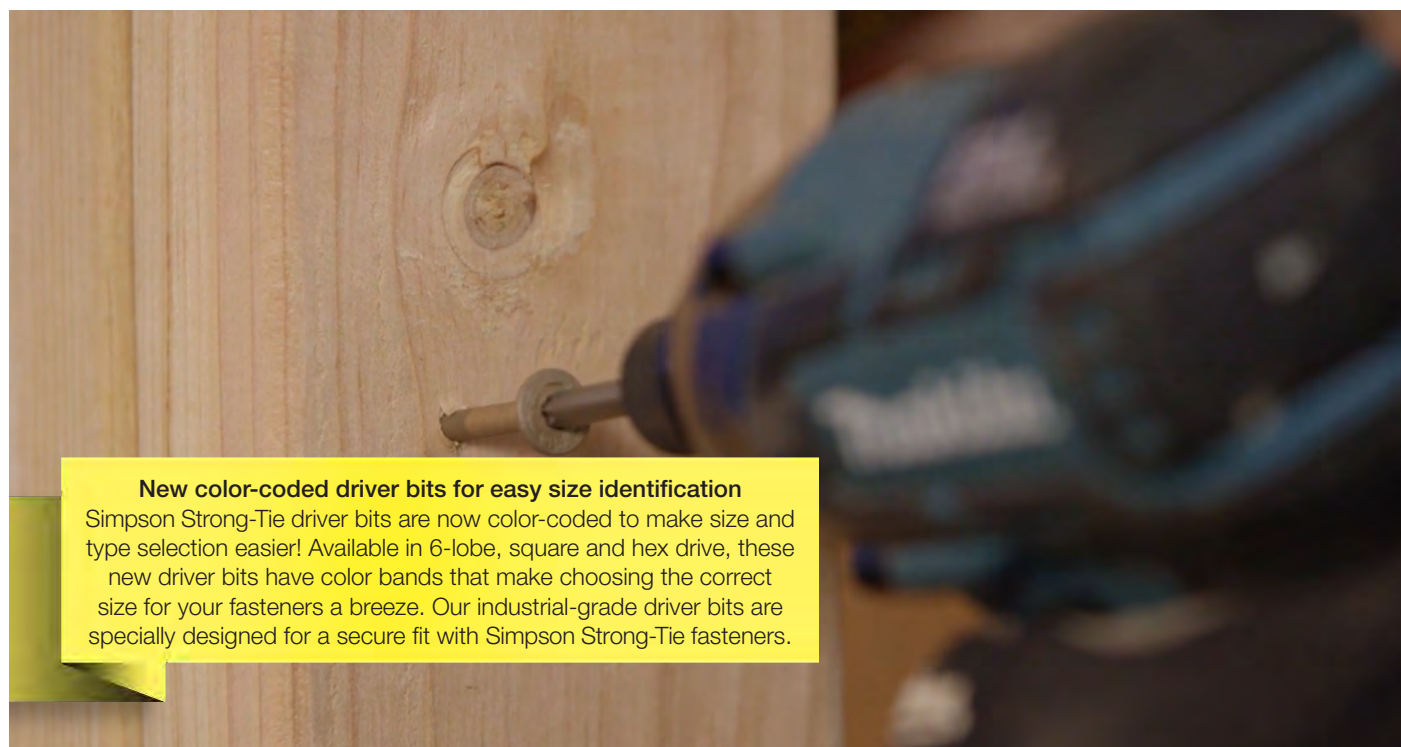

New color-coded driver bits for easy size identification
 Simpson Strong-Tie driver bits are now color-coded to make size and type selection easier! Available in 6-lobe, square and hex drive, these new driver bits have color bands that make choosing the correct size for your fasteners a breeze. Our industrial-grade driver bits are specially designed for a secure fit with Simpson Strong-Tie fasteners.


Quik Drive® Screw Driving Systems

Image	Model No.	Description	Barcode	Pack Qty
Quik Drive Attachments				
	QDPR0200G2A	PRO200 Attachment for 6 – 8g and 25 – 50mm screws. Includes carry case Plasterboard, Underlay	746056165606	1
	QDPR0200SG2	PRO200 Attachment for 8 – 12g and 25 – 50 mm screws. Includes carry case Flooring, Decking, Cladding (Ideal for SHORTER screws)	746056002406	1
	QDPR0250G2A	PRO250 Attachment for 8 – 12g and 40 – 65 mm screws. Includes carry case Flooring, Decking, Cladding	746056375555	1
	QDPR0300SG2A	PRO300 Attachment for 8 – 12g and 40 – 75 mm screws. Includes carry case Flooring, Decking, Cladding (Ideal for LONGER screws)	707392925255	1
	QDHSD60	HSD60 Attachment for 14g and 45 – 60 mm screws. Includes carry case Heavy Duty	746056020684	1
	QDBPC50E	BPC50 Attachment for CSA Series 35 – 50mm screws. Includes carry case Engineered Wood (CLT and Glulam) Timber Connectors	3523140853307	1
	QDHSD75	HSD75 Attachment for 14g and 45 – 75 mm screws. Includes carry case Heavy Duty	746056020691	1
Quik Drive Systems				
PRO250 system is ideal for, but not limited to, underlay, subfloor, sheathing and decking applications				
	QDPR0250G2IK *	PRO250 System for 8 – 12g and 40 – 65 mm screws. Attachment, Extension (QDXTG2), Adaptors (MAA3G2, HIAG2), Rugged Tool Case	746056018834	1
	PRO250G2M25KA	PRO250 System, includes Makita® FS2300 Screwgun Fitted with MAA3G2 adaptor	746056006855	1
	PRO250G2DC2KA	PRO250 System, includes DeWalt® DCF622 screw gun fitted with adaptor, Multivolt charger, 2 x 18V 5.0Ah batteries	707392013570	1
	PRO250G2DC2KA-S	PRO250 System, includes DeWalt® DCF622 screw gun fitted with adaptor, (Skin only)	707392013587	1

C-SSTAU23 © 2023 SIMPSON STRONG-TIE COMPANY INC.

Quik Drive®


Quik Drive® Screw Driving Systems

Image	Model No.	Description	Barcode	Pack Qty
	DCF622NG2	DeWalt® DCF622 screw gun (modified for Quik Drive) fitted with adaptor, (Skin only)	707392013594	1


Adaptors

	MAA3G2	Makita® adaptor suits DFS250 (cordless Screwgun), FS2500, FS2300 (remove wire and circlips) [201143]	746056665205	1
---	--------	--	--------------	---



Decking Accessories

	PDECKNC-RC	Decking clip set for screw and space setting 3 mm and 5 mm (Suits PRO250 and PRO300 only)	746056254935	1
---	------------	---	--------------	---



Spline Strap Accessories

	NEW PNOSECLIP-LDSS	Locator Nose Clip for LDSS48 Spline Strap (Suits PRO300 only)	707392020561	1
---	---------------------------	---	--------------	---


Replacement Parts

	G2HANDLE	Extension replacement handle, G2 Series	746056010869	1
	PFEEDPAWL7	Feed pawl, for PRO250, PRO300, PROPP150, PROPH attachments	746056058601	1
	PFEEDPAWLTL	Feed pawl, twist lock for PROHSD, SDS, PRO200 attachments	746056384755	1


Mandrels

	PMANDREL65	Mandrel for PRO200, PROPH attachments 160mm long	746056022923	1
	NEW PMANDREL75-RC	Mandrel for PRO250, PRO300, SDS, PROHSD attachments (Retail hang card) 190mm long	746056046042	1
	MANDREL128E	Mandrel for QDBCP50E attachment (Engineered Wood (CLT and Glulam) Timber Connectors) 128mm long	3523140619408	1
	PMANDRELEXTG2	Mandrel for QDEXTG2 extension 515mm long	746056434344	1

Driver Bits

Packs of 10				
	BIT2S-RC10	#2 Square drive bit	707392665502	10
	BIT2SU-RC10	#2 Square undersize drive bit	707392872405	10
	BIT3S-RC10	#3 Square drive bit	707392903406	10
	BIT3SU-RC10	#3 Square undersize drive bit	707392762003	10
	BITTX20-RC10	T-20 6-lobe drive bit	746056122258	10
	BITTX25-RC10	T-25 6-lobe drive bit	746056612889	10
	BITTX30-RC10	T-30 6-lobe drive bit	707392014409	10
	BITLTX20E	Quik Drive T-20 6-lobe drive bit for QDBCP50E (Engineered Wood (CLT and Glulam) Timber Connectors)	3523140670607	10

Extension

	QDEXTG2	Extension, 515 mm, G2 series (Standard)	746056057529	1
---	---------	---	--------------	---

Collated Screws for the Quik Drive® System



Image	Model No.	Description	Barcode	Box Qty	Bulk Buy
Deck-Drive™ Premium Fasteners Supplied with driver bit					
Hardwood					
DSD HARDWOOD Screw					
	DSDG50SA	12g x 50 mm	Quikguard® Grey	T-25	707392007708 1000 100
	SSDSD50SA	12g x 50 mm	316 Stainless Steel	T-25	707392007678 1000 100
	SSDSD65SA	12g x 65 mm		T-25	707392007647 1000 100
	SSDSD1475SA *	14g x 75 mm		T-30	707392001331 750 100
		Flat countersinking head, Hardwood drill point			
DHSD HARDWOOD Screw					
	SSDHSD50TSA	12g x 50 mm	316 Stainless Steel, T-20 6-lobe drive		707392010203 1000 100
	SSDHSD65TSA	12g x 65 mm			707392010210 1000 100
	SSDHSD60S	12g x 60 mm	305 Stainless Steel, #2 Sq. drive		746056675808 1000 100
		Raised countersunk head, Hardwood Drill point			
DHW HARDWOOD Screw					
	SSDHW60SA	10g x 60mm	305 Stainless Steel, #2 Sq. drive		707392450443 1000 100
		Compact head, Winged, Hardwood drill point			
Softwood					
DSV SOFTWOOD Screw					
	DSVT2S	10g x 50 mm	Rimmed flat head with nibs, Variable thread design, Quikguard® Tan. T-25 6-lobe drive		746056948308 1500 100
	DSVT212S	10g x 65 mm			746056479802 1000 100
	DSVT3S	10g x 75 mm			746056157205 1000 100
Timber to Steel					
BFHSD BI-METAL Screw					
	SSBFHSD2SA	10g x 50 mm	316 Stainless Steel Bi-Metal, #2 Sq. Drive		746056751700 1000 100
		Ribbed flat head, 16 TPI, #2 drill point,			
Winged Self Drilling Screws Supplied with driver bit					
Cement Sheet / Underlay and Timber-to-Steel					
	CBSDG1SA	8g x 25 mm	Ribbed flat head, 18 TPI, #2 drill point, Class 3 Galvanised, #2 Undersize sq. drive		746056000303 2500 100
	CBSDG114SA	8g x 32 mm			746056000204 1500 100
	CBSDG158SA	8g x 42 mm			746056000105 1500 100
	CBSDGL158SA	10g x 42 mm			746056214434 1500 100
	CBSDGL214SA	10g x 55 mm			746056528906 1000 100
	CBSDGL3SA	10g x 75 mm			707392945277 1000 100
Compressed Cement Sheet-to-Steel					
	CBSDHG158SA	10g x 42 mm	Ribbed flat head, 16 TPI, #2 drill point, Class 3 Galvanised, #3 Sq. drive		746056186748 1500 100
	CBSDHG214SA	10g x 55 mm			746056275305 1000 100
Heavy Duty 14g Screws *Suitable for use with the Quik Drive PROHSD					
	TBG1445SA	14g x 45 mm	Flat head w/nibs, 14 TPI, #4 drill point, Class 3 Galvanised, #3 Undersize sq. drive		746056154501 1000 100
	TBG1460S	14g x 60 mm			746056003069 750 100
	TBG1475S	14g x 75 mm			746056003076 750 100

C-SSTAU23 © 2023 SIMPSON STRONG-TIE COMPANY INC.

Collated Screws










Collated Screws for the Quik Drive® System 

Image	Model No.		Description	Barcode	Box Qty	Bulk Buy
Cement Sheet / Underlay Screws Supplied with driver bit						
	MTHG114SA	7g x 32 mm	Trim head w/nibs, #2 Undersize sq. drive	707392352907	2500	100
				Hi-Lo Thread, Sharp point, Class 3 Galvanised		
	WSCBGHLA114SA	8g x 32 mm	Wafer head w/nibs, #2 Undersize sq. drive	746056654803	2000	100
	WSCBGA158SA	8g x 42 mm	Type 17, Class 3 Galvanised	746056897101	2000	100
Steel Subfloor Screw Supplied with driver bit						
	PPSD1050SA	10g x 50 mm	Rimmed flat head w/nibs, 16 TPI, #2 drill point, Yellow Zinc, T-25 6-lobe drive	707392000440	2000	100
	NEW PPHDQ134S1016	10g x 45 mm	Flat head, 16 TPI, #5 drill point, T-25 drive	Quik Guard® Coating 707392017974	2000	100
Flooring Screws Supplied with driver bit						
	WSC114SA	8g x 32 mm	Flat head w/nibs, Type 17, Yellow zinc, #2 Sq. drive	746056423157	2500	100
	WSV45SA	10g (4.8 mm) x 45 mm		707392014126	2000	100
	WSV50SA	10g (4.8 mm) x 50 mm	Ribbed head, Aggressive variable thread, Sharp point, Yellow zinc.	707392004622	2000	100
	WSV50-2500		T-25 6-lobe drive	Complies with AS1860.2 707392007630	2500	80
	WSV64SA	10g (4.8 mm) x 64 mm		707392014133	1500	100
	WSV75SA	10g (4.8 mm) x 75 mm		707392014140	1000	100
CSA Connector Screw (Suits Certain Mass Timber Connectors)						
	NEW CSA5.0X40T		5.0 x 40mm Pan head, Type 17, Carbon steel, T-20 6-lobe drive	3523140828404	1500	—
	NEW CSA5.0X50T		5.0 x 50mm Pan head, Type 17, Carbon steel, T-20 6-lobe drive	3523140543000	1000	—

C-SSTAL23 © 2023 SIMPSON STRONG-TIE COMPANY INC.

Collated Screws

Anchoring Systems for Concrete and Masonry

Image	Model No.	Description	Size	Barcode	Box Qty	Bulk Buy
Epoxy Anchoring Adhesives						
	SET-XP650-AU	High-performance epoxy anchoring adhesive for cracked and uncracked concrete (Includes 2 mixing nozzles — EMN22i)	650 ml	707392661399	10	240
Anchoring Adhesives with Colour Change Technology						
	AT-HP300BLUE	Fast cure vinyl ester anchoring adhesive with colour change technology (Includes 2 mixing nozzles — MN1)	300 ml	707392009306	12	240
Vinylester Anchoring Adhesive						
	VT-HP300GREY	Fast cure vinyl ester anchoring adhesive with C1 and C2 ETA (Includes 2 mixing nozzles - MN1)	300 ml	501536001216	12	240
Adhesive Accessories						
	EDT22S	Manual dispensing tool for 650 ml cartridges		707392239000	1	12
	DT300	Manual dispensing tool for 300 ml cartridges		3523140800707	1	12
Mixing Nozzles						
	EMN22i-RP10	Mixing nozzle for 650ml Epoxy Adhesives, Pack of 10		707392279006	1	12
	MN1-RP10	Mixing nozzle suits AT-HP™ & VT-HP Adhesives, Pack of 10		3523140628905	1	12
Hole Cleaning						
	PUMP	Blow-out dust pump for hole cleaning		3523140669809	1	4
Hole Cleaning Brushes						
	ETB6	Nylon bristle hole cleaning brush - suits 12-20mm hole	406mm	044315100901	1	—
	ETB8	Nylon bristle hole cleaning brush - suits 20-24mm hole	406mm	044315703805	1	—
	ETB10	Nylon bristle hole cleaning brush - suits 24-28mm hole	736mm	044315309403	1	—
	ETB12	Nylon bristle hole cleaning brush - suits 30-35mm hole	864mm	707392377801	1	—

C-SSTA23 © 2023 SIMPSON STRONG-TIE COMPANY INC.

Not all anchors are made the same. Fortunately, **Titen HD® Heavy Duty Screw Anchors** are ETA tested which means they comply with AS 5216.

Anchoring Systems for Concrete and Masonry

Image	Model No.	Description	Barcode	Box Qty	Ctn Qty	Bulk Buy	
Mechanical Anchors							
Titen HD® Heavy Duty Screw Anchor for Concrete and Masonry							
Mechanically Galvanised							
	THD10060MG	M10	60 mm	5397062911104	50	200	1000
	THD10100MG		100 mm	5397062505402			
	THD12110MG		110 mm	5397062506201			
	THD12130MG	M12	130 mm	5397062506409	20	—	400
	THD12150MG		150 mm	5397062506607			
	THD16150MG	M16	150 mm	5397062510000	10	—	200
	THD20150MG	M20	150 mm	5397062507109	5	20	100
	THD20170MG		170 mm	5397062507307		10	
Titen HD® Heavy Duty Screw Anchor for Concrete and Masonry - Large Washer Head, Serrated Teeth Tip							
Mechanically Galvanised							
	THD12150WHMG	M12	150 mm	707392020530	15	—	—
Hex Head – Zinc plated with ceramic coating							
	TNT25114H	6.5 mm	32 mm	707392005117	100	1600	1600
	TNT25134H		45 mm	707392005131			
	TNT25214H		57 mm	707392005155			
	TNT25234H		70 mm	707392005179			
	TNT25314H		83 mm	707392005193			
	TNT25334H		95 mm	707392005216			
	TNT25400H		102 mm	707392005230			
Countersunk Head – Zinc plated with ceramic coating							
	TNT25134TF	6.5 mm	45 mm	707392005148	100	500	500
	TNT25214TF		57 mm	707392005162			
	TNT25234TF		70 mm	707392005186			
	TNT25314TF		83 mm	707392005209			
	TNT25334TF		95 mm	707392005223			
	TNT25400TF		102 mm	707392005247			
	Titen® Concrete and Masonry Screw Drill Bit – Required for correct installation of Titen Turbo™						
	MDB18512C1	3/8" x 5 1/2" (140mm), 100mm drilling depth. Concrete and Masonry Drill Bit (Carded Single)		707392797951	1	10	10
Titen® Concrete and Masonry Screw Drill Bit - Required for correct installation*							
	MDPL01806	3/8" x 6 1/4" (159mm), 100mm drilling depth. SDS-plus® Shank, 2-Cutter Head, Masonry Drill Bit		707392514800	1	200	200
	MDPL01808	3/8" x 8 1/4" (210mm), 150mm drilling depth. SDS-plus® Shank, 2-Cutter Head, Masonry Drill Bit		707392104407	1	125	125

Anchoring Systems for Concrete and Masonry

Image	Model No.	Description	Size	Barcode	Box Qty	Bulk Buy
Powder-Actuated Fastening Systems						
Semi-Automatic Tool						
	PT-27	Strip feed and manual cycle .27 caliber tool includes accessories and carry case	16 – 72 mm pins	707392649809	1	6

Note: Maximum pin size of 72mm.

PAT Application Guide General Notes

- Average pin embedment into concrete is 19–32 mm.
- To determine pin length for concrete:
add fixture thickness and embedment depths.
- To determine pin length for steel applications:
add fixture thickness plus steel thickness plus 3 mm. Getting the point to pass through steel 3 mm maximises holding strength.
- When selecting a load power level, it is recommended to make a test fastening with the lowest power level.
If the powder load does not set the fastener, try the next highest load, and so on, until the fastener is properly set.

For fastening →	Timber (45 mm thick)	Timber (25 mm thick)	Plywood (19 mm thick)	Steel Fixtures/Conduit Clips (light steel)	Drywall Track
Into ↓	Pin Length (mm)				
Concrete	72	52	42	27	19
Cement Block	72	52	42	27	27
Steel (5–6 mm)	62	32 (washed)	32 (washed)	19	16 (knurled)
Steel (6–8 mm)	62	42 (washed)	32 (washed)	19	16 (knurled)

- To be used as a guide only—see General Notes
- Recommended minimum embedment depth for maximum holding strength: Steel = 12 mm; Concrete/Cement Block = 25 mm

Note: Tool warranty only valid when using Simpson Strong-Tie® loads.

Image	Model No.	Description	Size	Barcode	Box Qty	Bulk Buy
Powder Loads						
Colour Code and levels match DIN Standards						
.27 Caliber plastic strip loads — 10 per strip						
	P27SL2	Brown (Level 2) suits auto and semi tools		707392577515		
	P27SL3	Green (Level 3) suits auto and semi tools		707392642015		
	P27SL4	Yellow (Level 4) suits auto and semi tools	.27 Cal	707392983019	100	5000
	P27SL5	Red (Level 5) suits auto and semi tools		707392932611		


Fasteners

Loose Drive Pins

	PDPA-75		19 mm	707392470519		
	PDPA-100	Head: 7.6 mm	27 mm	707392818823		
	PDPA-125	Shank Diameter: 3.98 mm	32 mm	707392810520		
	PDPA-150	Tip: Ballistic point	37 mm	707392373124		
	PDPA-187	Finish: Zinc coated	47 mm	707392143420	100	1000
	PDPA-200MG	Head: 7.6 mm	52 mm	707392556800		
	PDPA-250MG	Shank Diameter: 3.98 mm	62 mm	707392392804		
	PDPA-287MG	Tip: Ballistic point	72 mm	707392512202		
		Finish: Mechanically Galvanised				

Loose Washered Pins

	PDPAWL-100		27 mm	707392460015		
	PDPAWL-125	Head: 7.6 mm	32 mm	707392530015		
	PDPAWL-187	Shank Diameter: 3.98 mm	47 mm	707392329022		
	PDPAWL-200	Washer: 24 mm	52 mm	707392708810	100	1000
	PDPAWL-250	Tip: Ballistic point	62 mm	707392739210		
	PDPAWL-287	Finish: Zinc coated	72 mm	707392653813		



Every day we work hard to earn your business, blending the talents of our people with the quality of our products and services to exceed your expectations. This is our pledge to you.

Simpson Strong-Tie® Australia Pty. Limited

ABN: 590 8888 3863

Call **1300 STRONGTIE** | strongtie.com.au